
V-2AM 2PC PNEUMATIC BALL VALVE

1000WOG
3/8” – 4”

STAINLESS STEEL 316 · ISO 5211 DIRECT MOUNT · DOUBLE ACTING OR SPRING RETURN

01 ASSEMBLY DRAWING

UNIT : MM

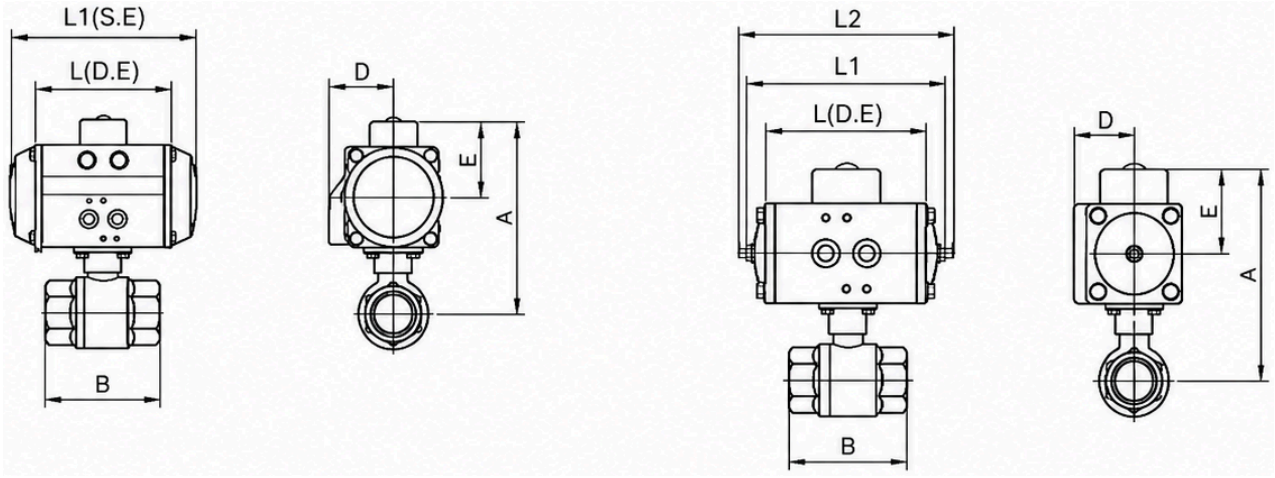

RACK-AND-PINION ACTUATOR · ISO 5211 PAD CAST INTO THE VALVE BODY · NO BRACKET, NO COUPLING

02 SPECIFICATION

BODY MATERIAL **316 STAINLESS**	NOMINAL BORE **3/8” – 4”**	THREAD **PT TAPER** (others m.t.o.)	SEAT **PTFE**
WORKING PRESSURE **1000 WOG**	PORT **FULL PORT**	ACTUATION **DA / SR** (on–off)	AIR SUPPLY **4–8 BAR**

03 DIMENSIONS

UNIT : MM

DN	A	B	D	E	L	L1	L2
3/8”	118	62	35	80	95	107	123
1/2”	118	62	35	80	95	107	123
3/4”	123	70	35	80	95	107	123
1”	141	80	42	93	110	143	
1”1/4	164	96	48	109	120	162	
1”1/2	175	113	48	109	120	162	
2”	200	125	52	126	156	212	
2”1/2	238	156	56	139	190	248	
3”	260	173	67	151	199	268	

A · B · D · E · L · L1 · L2 AS MARKED ON THE ASSEMBLY DRAWING ABOVE.
L2 IS SPECIFIED FOR 3/8”, 1/2” AND 3/4” ONLY.
4” IS AVAILABLE — ASSEMBLY DIMENSIONS ON REQUEST.