
V-2VN PNEUMATIC VACUUM BALL VALVE

2″
NW50

STAINLESS STEEL 316 · NW50 ISO-KF CLAMP FLANGE · FULL PORT · ISO 5211 MOUNTING PAD

01 ASSEMBLY DRAWING

UNIT : MM

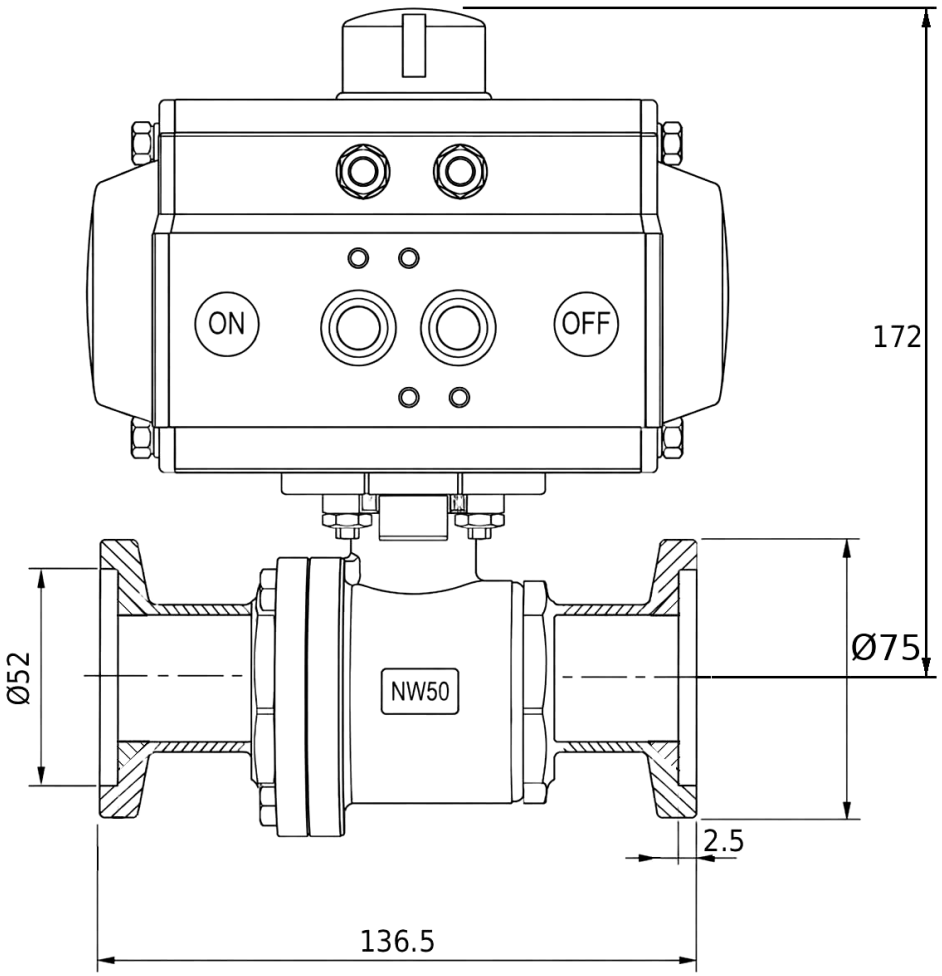

NW50 ISO-KF CLAMP FLANGE BOTH ENDS · RACK-AND-PINION PNEUMATIC ACTUATOR · ISO 5211 MOUNTING PAD

02 SPECIFICATION

BODY MATERIAL **A351 CF8M (316)**	CONNECTION **NW50 ISO-KF**	SEAT & SEALS **PTFE**	PORT **FULL PORT**
ACTUATION **DA / SR**	MOUNTING PAD **ISO 5211**	AIR SUPPLY **4–8 BAR (58–116 PSI)**	TEMPERATURE (VALVE) **–20 – 180 °C**

03 DIMENSIONS

UNIT : MM

L OVERALL LENGTH	H CENTER TO TOP	ØD FLANGE O.D.	Ød TUBE O.D.	t FLANGE THICKNESS
136.5	**172**	**Ø75**	**Ø52**	**2.5**

L: FLANGE FACE TO FLANGE FACE · H: PIPE CENTERLINE TO ACTUATOR TOP · ØD / Ød / t: NW50 ISO-KF CLAMP FLANGE