
Y-STRAINER

SZ VALVES INTERNATIONAL
Stainless Steel Valve Manufacturer

STAINLESS STEEL THREADED · INDUSTRIAL FLUID LINE FILTRATION

01 ASSEMBLY

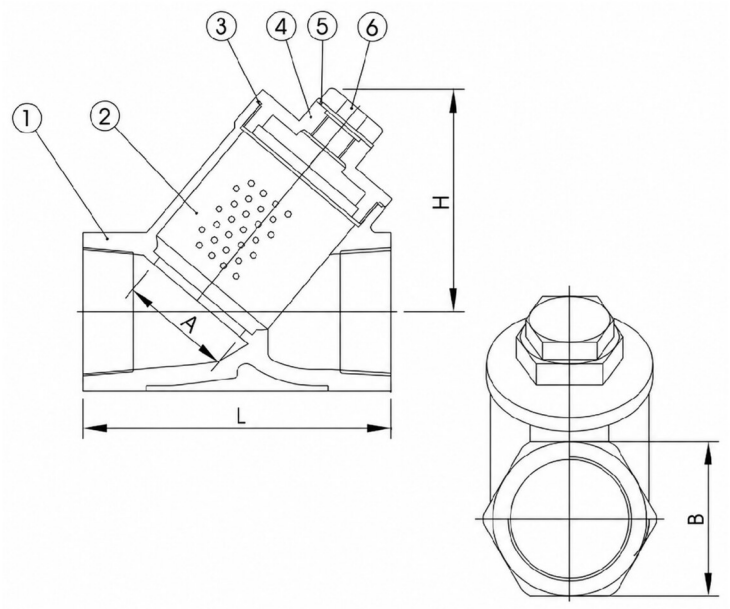

ASSEMBLY DRAWING · UNIT : MM

02 SPEC

800 PSI
MAX WORKING PRESSURE

1/4″–3″
NOMINAL BORE

SS316
BODY MATERIAL

20·60·100 MESH
SCREEN MESH

03 MATERIAL LIST

NO	PART	MATERIAL	QTY
1	**Body**	ASTM A-351 Gr.CF8M	1
2	**Screen**	SUS 316 · 20/60/100 Mesh	1
3	**Gasket**	TEFLON	1
4	**Bonnet**	ASTM A-351 Gr.CF8M	1
5	**O-Ring**	TEFLON	1
6	**Blow Off**	ASTM A-351 Gr.CF8M	1

04 DIMENSIONS (MM)

SIZE	A	B	H	L
1/4″	11	23	43	65
3/8″	13	23	43	65
1/2″	15	26	43	65
3/4″	20	32	46.5	80
1″	25	41	60	90
1-1/4″	32	51	66.5	105
1-1/2″	38	57	76	120
2″	50	69	81	141
2-1/2″	65	87	93	180
3″	80	102	140	200