
V-2D M×F Threaded Ball Valve

304 S.S.

TWO-PIECE BALL VALVE · MALE × FEMALE THREADED · STAINLESS STEEL #304

01 ASSEMBLY

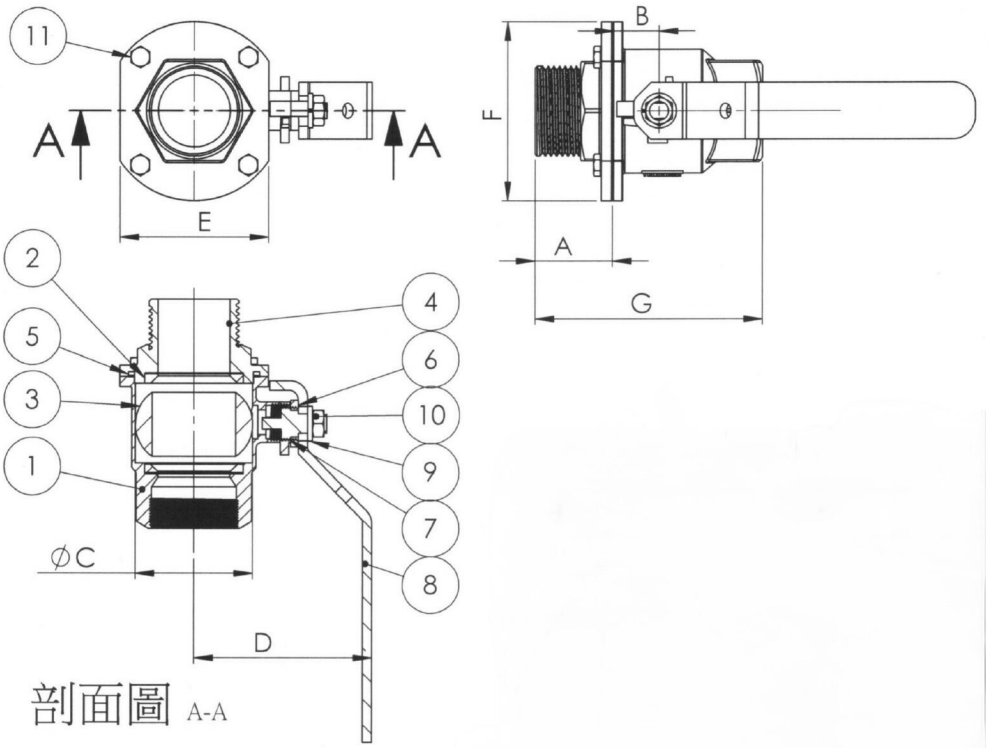

02 SPEC

BODY MATERIAL

SS304

NOMINAL SIZE

1/2″–2″

BALL & STEM

SS304

SEAL

PTFE

ASSEMBLY DRAWING (SECTION A-A) · UNIT: MM · NO.1–11 → MATERIAL LIST

03 MATERIAL LIST

NO	PART NAME	MATERIAL	Q'TY
1	**Body** FEMALE THREADED END	SS304	1
2	**PTFE Gasket A**	PTFE	2
3	**Ball**	SS304	1
4	**Cap** MALE THREADED END	SS304	1
5	**PTFE Gasket B**	PTFE	1
6	**Locking Plate**	–	1

NO	PART NAME	MATERIAL	Q'TY
7	**Stem Retainer**	SS304	1
8	**Handle**	SS304	1
9	**Spring Washer** JIS B1251 NO.2 10	SS304	1
10	**Hex Nut** M10×1.5	SS304	1
11	**Hex Bolt** M6×12	SS304	4

04 DIMENSIONS (MM)

SIZE	A	B	C	D	E	F	G
1/2″	26	14	58.5	56.2	42	50	71
3/4″	33	16	61.7	65.8	50	60	85
1″	35.2	18.3	78.2	81.7	56.5	71.5	92.6
1-1/4″	37.8	19.3	80	105	72	82	106
1-1/2″	41	24.4	88.7	134.6	78.5	94.5	122
2″	47.2	26.6	97	154	90	106.5	136

UNIT: MM · BODY / BALL / STEM: STAINLESS STEEL #304 · FASTENERS: #304 · SEAL: PTFE · FASTENERS PER JIS B1251