
3-WAY Tri-Clamp 3-Way Ball Valve

1000
WOG

TRI-CLAMP 3-WAY BALL VALVE · T / L PORT · 1000 WOG · STAINLESS STEEL

01 ASSEMBLY

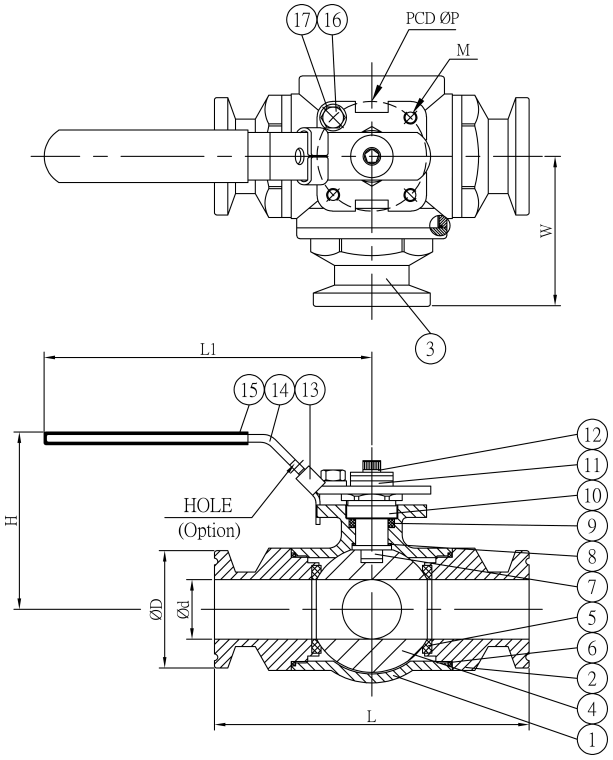

ASSEMBLY DRAWING · UNIT: MM · NO.1-17 → MATERIAL LIST

02 SPEC

BODY MATERIAL

CF8M

NOMINAL SIZE

1/2″–2″

PORT

T / L Port

CONNECTION

Tri-Clamp

WORKING PRESSURE

1000 WOG

03 MATERIAL LIST

NO	PART NAME	MATERIAL	QTY
1	**BODY**	ASTM A351 Gr.CF8M	1
2	**CAP-A**	ASTM A351 Gr.CF8M	2
3	**CAP-B**	ASTM A351 Gr.CF8M	1
4	**BALL**	ASTM A351 Gr.CF8M	1
5	**SEAT**	PTFE	4
6	**GASKET**	PTFE	3
7	**STEM**	ASTM A276 Gr.316/304	1
8	**THRUST WASHER**	PTFE	1
9	**PACKING**	PTFE	1

NO	PART NAME	MATERIAL	QTY
10	**GLAND**	S.S.304	1
11	**STEM WASHER**	S.S.304	2
12	**HEX SOCKET SCREW**	S.S.304	1
13	**LOCKING PLATE**	S.S.304	1
14	**HANDLE**	S.S.304	1
15	**HANDLE SLEEVE**	VINYL GRIP	1
16	**BOLT**	S.S.304	1
17	**STOP PIN**	S.S.304	1

04 DIMENSIONS (MM)

SIZE	Ød	ØD	L	H	L1	W	M	ØP
1/2″	9.5	25.0	117.2	66	131	58.6	M5	42
3/4″	15.8	25.0	120.6	86	185	60.3	M6	50
1″	22.1	50.4	136.3	90	185	68.2	M6	50
1-1/2″	34.8	50.4	155.0	104	203	77.5	M8	70
2″	47.5	63.9	164.8	110	226	81.6	M8	70